

ES-T7-R

10GBase-T Copper SFP+ 100M Transceiver

Product Features

- Up to 10Gb/s bi-directional data links
- Hot-pluggable SFP+ footprint
- Fully metallic enclosure for low EMI
- Low power dissipation
- Compact RJ-45 connector assembly
- Access to physical layer IC via 2-wire serial bus
- Supports Links up to 100m using Cat 6a/7 Cable
- RoHS Compliant
- Operating case temperature: 0°C to 70°C

Applications

- 10 Gigabit Ethernet over Cat 6a/7 cable

Description

ETU-LINK's ES-T7-R Copper Enhanced Small Form Pluggable (SFP+) transceivers are high performance, cost effective module compliant with the 10G Ethernet and 10GBASE-T standards as specified in IEEE 802.3az, which supporting 10Gbps data- rate up to 100 meters reach over unshielded twisted-pair category 6a/7 cables. The module provides standard serial ID information compliant with SFP+ MSA, which can be accessed with address of A0h via the 2wire serial EEPROM protocol.

Ordering information

Part Number	Tx_DIS	Link Indicator on Rx_LOS Pin	Temp.
ES-T7-R	Yes	Yes	0~70°C

Electrical Power Interface

+3.3V volt Electrical Power Interface						
Parameter	Symbol	Min	Typ	Max	Units	Notes/Conditions
Supply Current	Is			750	mA	2.5W max power over full range of voltage and temperature. See caution note below
Input Voltage	Vcc	3.13	3.3	3.47	V	Referenced to GND
Maximum Voltage	Vmax			3.8	V	
Surge Current	Isurge			30	mA	Hot plug above steady state current.


General Specifications

General						
Parameter	Symbol	Min	Typ	Max	Units	Notes/Conditions
Data Rate	BR		10.3		Gb/sec	IEEE 802.3 compatible.
Cable Length	L			100	m	Category 6a/7 UTP. BER <10-12

Environmental Specifications


Environmental Specifications						
Parameter	Symbol	Min	Typ	Max	Units	Notes/Conditions
Operating Temperature	Top	0		70	°C	Case temperature
Storage Temperature	Tsto	-40		85	°C	Ambient temperature

Pin Descriptions

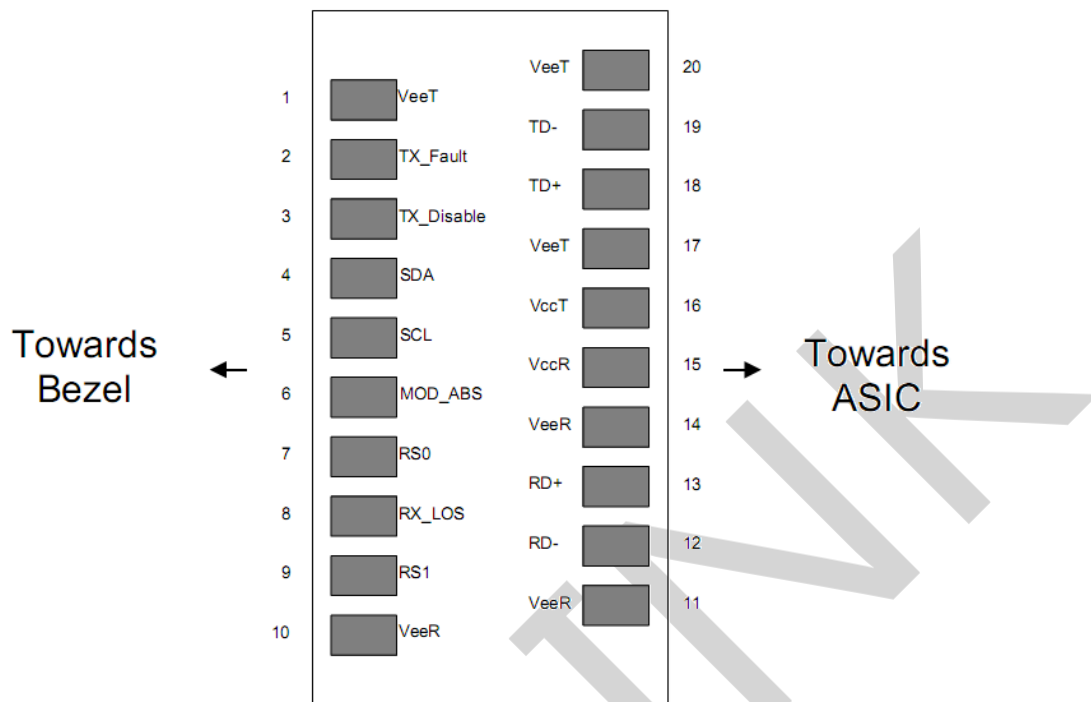


Pin	Signal Name	Description	Plug Seq.	Notes
1	V _{EET}	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Not supported
3	TX DISABLE	Transmitter Disable	3	
4	SDA	SDA Serial Data Signal	3	
5	SCL	SCL Serial Clock Signal	3	
6	MOD_ABS	Module Absent. Grounded within the module	3	
7	RS0	Not Connected	3	
8	LOS	Loss of Signal	3	
9	RS1	Not Connected	3	
10	V _{EER}	Receiver ground	1	
11	V _{EER}	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	
13	RD+	Received Data Out	3	
14	V _{EER}	Receiver ground	1	
15	V _{CCR}	Receiver Power Supply	2	
16	V _{CCT}	Transmitter Power Supply	2	
17	V _{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	
19	TD-	Inv. Transmit Data In	3	
20	V _{EET}	Transmitter Ground	1	

Recommended Interface Circuit

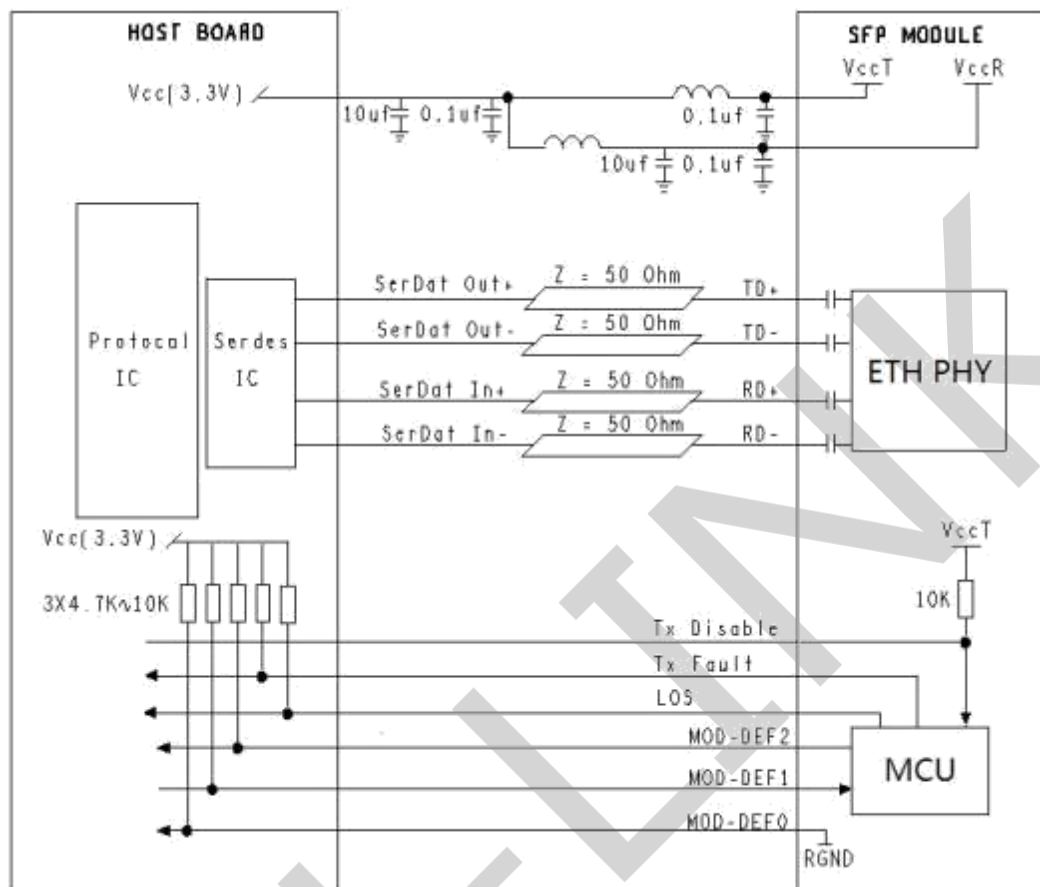

Mechanical Specifications

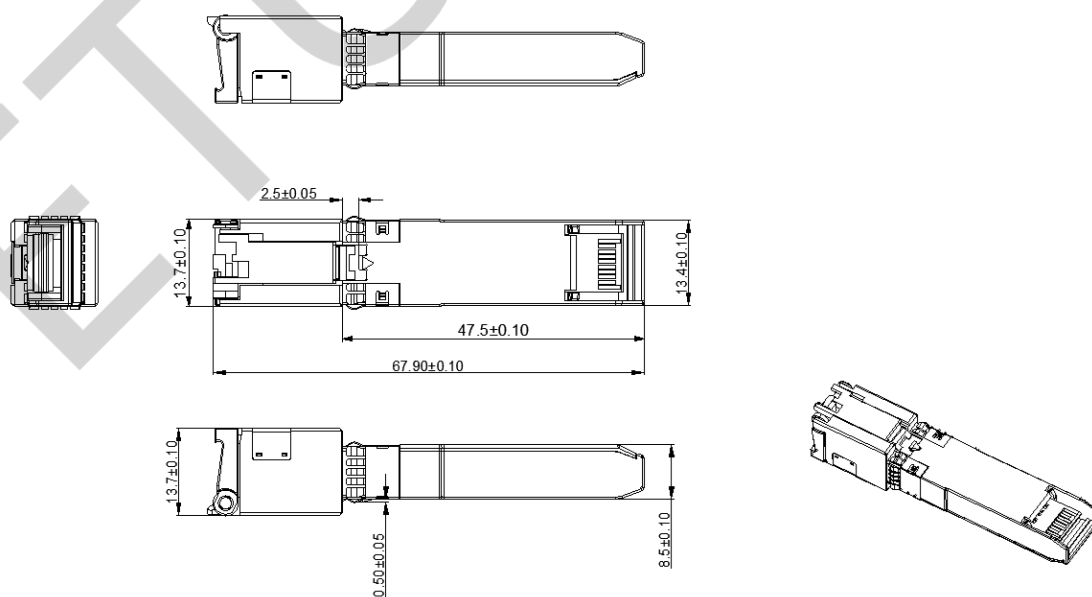

Revision History

Version No.	Date	Description
1.0	August 29, 2018	Preliminary datasheet
2.0	July 26, 2024	Format change

Company: ETU-Link Technology Co., LTD

Production base: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street,
Longhua District, Shenzhen city, Guangdong Province, China 518109

R&D base: Floor 4, Building 4, Nanshan Yungu Phase LI, Taoyuan Community, Xili Street, Nanshan District,
Shenzhen

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at www.etulinktechnology.com.

Please e-mail us at sales@etulinktechnology.com or call us for assistance.