

## QSFP+

### EQDP5X-33CNxx

#### 56G QSFP+ to QSFP+ Direct Attach Cable

- Compliant with SFF- 8436.
- Up to 14.3125Gbps data rate per channel
- Up to 7m transmission
- Operating temperature: 0~70°C
- Single 3.3V power supply
- RoHS compliant



## Applications

- 56G InfiniBand

## Benefits

- Cost-effective copper solution
- Lowest total system power solution
- Lowest total system EMI solution
- Optimized design for Signal Integrity


## General Description

QSFP+ Direct Attach Cables are compliant with the SFF-8436 specifications. Various choices of wire gauge are available from 30 to 24 AWG with various choices of cable length (up to 7m).

## Pin Function Definition


| Pin | Logic       | Symbol  | Description                         |
|-----|-------------|---------|-------------------------------------|
| 1   |             | GND     | Ground                              |
| 2   | CML-I       | Tx2n    | Transmitter Inverted Data Input     |
| 3   | CML-I       | Tx2p    | Transmitter Non-Inverted Data Input |
| 4   |             | GND     | Ground                              |
| 5   | CML-I       | Tx4n    | Transmitter Inverted Data Input     |
| 6   | CML-I       | Tx4p    | Transmitter Non-Inverted Data Input |
| 7   |             | GND     | Ground                              |
| 8   | LVTTL-I     | ModSelL | Module Select                       |
| 9   | LVTTL-I     | ResetL  | Module Reset                        |
| 10  |             | Vcc Rx  | +3.3V Power Supply Receiver         |
| 11  | LVC MOS-I/O | SCL     | 2-wire serial interface clock       |
| 12  | LVC MOS-I/O | SDA     | 2-wire serial interface data        |
| 13  |             | GND     | Ground                              |
| 14  | CML-O       | Rx3p    | Receiver Non-Inverted Data Output   |
| 15  | CML-O       | Rx3n    | Receiver Inverted Data Output       |
| 16  |             | GND     | Ground                              |
| 17  | CML-O       | Rx1p    | Receiver Non-Inverted Data Output   |
| 18  | CML-O       | Rx1n    | Receiver Inverted Data Output       |
| 19  |             | GND     | Ground                              |
| 20  |             | GND     | Ground                              |
| 21  | CML-O       | Rx2n    | Receiver Inverted Data Output       |
| 22  | CML-O       | Rx2p    | Receiver Non-Inverted Data Output   |
| 23  |             | GND     | Ground                              |
| 24  | CML-O       | Rx4n    | Receiver Inverted Data Output       |
| 25  | CML-O       | Rx4p    | Receiver Non-Inverted Data Output   |
| 26  |             | GND     | Ground                              |
| 27  | LVTTL-O     | ModPrsL | Module Present                      |
| 28  | LVTTL-O     | IntL    | Interrupt                           |
| 29  |             | Vcc Tx  | +3.3V Power supply transmitter      |

|    |         |        |                                     |
|----|---------|--------|-------------------------------------|
| 30 |         | Vcc1   | +3.3V Power supply                  |
| 31 | LVTTL-I | LPMode | Low Power Mode                      |
| 32 |         | GND    | Ground                              |
| 33 | CML-I   | Tx3p   | Transmitter Non-Inverted Data Input |
| 34 | CML-I   | Tx3n   | Transmitter Inverted Data Input     |
| 35 |         | GND    | Ground                              |
| 36 | CML-I   | Tx1p   | Transmitter Non-Inverted Data Input |
| 37 | CML-I   | Tx1n   | Transmitter Inverted Data Input     |
| 38 |         | GND    | Ground                              |

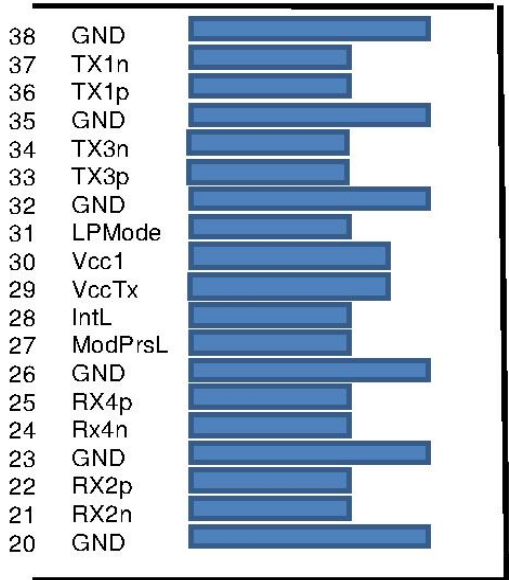

Top Side  
Viewed From Top

Module Card Edge

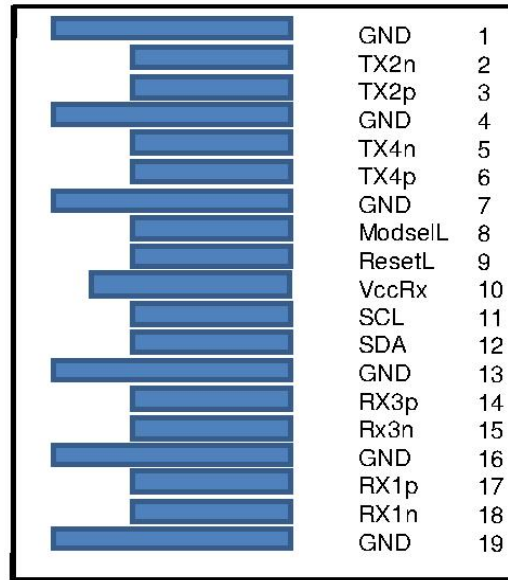

Bottom Side  
Viewed From Bottom

## General Product Characteristics


| QSFP+ DAC Specifications |                          |
|--------------------------|--------------------------|
| Number of Lanes          | Tx & Rx                  |
| Channel Data Rate        | 14.3125 Gbps             |
| Operating Temperature    | 0 to + 70°C              |
| Storage Temperature      | -40 to + 85°C            |
| Supply Voltage           | 3.3 V nominal            |
| Electrical Interface     | 38 pins edge connector   |
| Management Interface     | Serial, I <sup>2</sup> C |

## High Speed Characteristics

| Parameter                              | Symbol | Min                                      | Typ | Max  | Units | Notes       |
|--|--------|--|-----|------|-------|-------------|
| Differential Impedance                 | Zd     | 90                                       | 100 | 110  | Ω     |             |
| Differential Input Return Loss         | SDDXX  | <-12+2* SQRT (f) with f in GHz           |     |      | dB    | 0.01~4.1GHz |
|  |        | <-6.3+13*<br>Log10/(f/5.5) with f in GHz |     |      | dB    | 4.1~11.1GHz |
| Common Mode Output Return Loss         | SCCXX  | < -7+1.6*f with f in GHz                 |     |      | dB    | 0.01~2.5GHz |
|  |        |  |     | -3   | dB    | 2.5~11.1GHz |
| Difference Waveform Distortion Penalty | dWDPc  |  |     | 6.75 | dB    |             |
| VMA Loss                               | L      |  |     | 4.4  | dB    |             |
| VMA Loss to Crosstalk Ratio            | VCR    | 32.5                                     |     |      | dB    |             |

## Mechanical Specifications

The connector is compatible with the SFF-8436 specification.

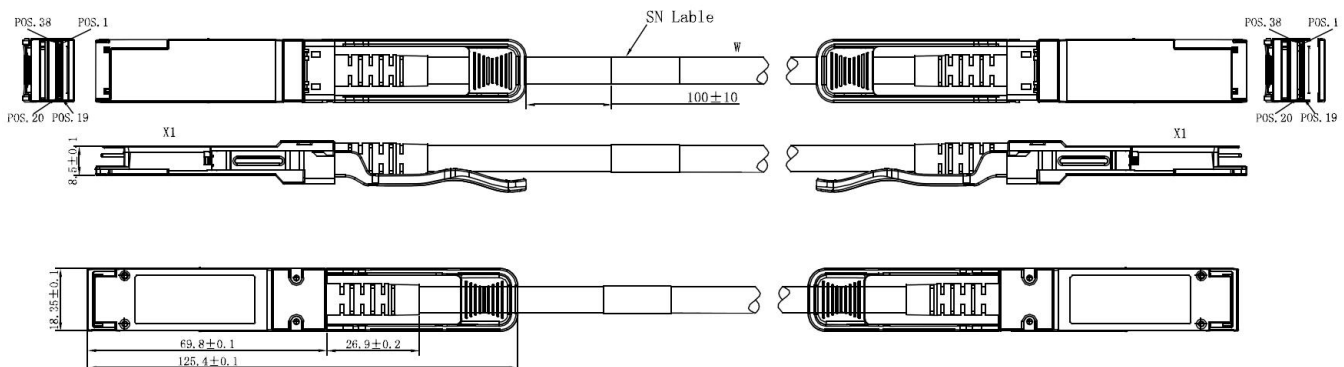

| Length (m) | Cable AWG |
|------------|-----------|
| 1          | 30        |
| 2          | 30/26     |
| 3          | 30/26     |
| 4          | 26        |
| 5          | 26/24     |
| 6          | 24        |
| 7          | 24        |

## Regulatory Compliance

| Feature  | Test Method   | Performance   |
|--|---|---|
| Electrostatic Discharge (ESD) to the Electrical Pins | MIL-STD-883C Method 3015.7                                  | Class 1(>2000 Volts)  |
| Electromagnetic Interference(EMI)                    | FCC Class B   | Compliant with Standards  |
|  | CENELEC EN55022 Class B                                     |   |
|  | CISPR22 ITE Class B   |   |
| RF Immunity(RFI)                                     | IEC61000-4-3  | Typically Show no Measurable Effect from a 10V/m Field Swept from 80 to 1000MHz |
| RoHS Compliance                                      | RoHS Directive 2011/65/EU and it's Amendment Directives 6/6 | RoHS 6/6 compliant  |

## Compatibility Test

In order to ensure the product compatibility, our products will be tested on the switch before shipment. Our modules can be compatible with many mainstream brand switches, such as Cisco, Juniper, Extreme, Brocade, IBM, H3C, HP, Huawei, D-Link, Mikrotik, ZTE, TP-Link...

Our test equipment: VOLKTEK MEN-4110, HP 2530-8G, CRS226-24G-25+RM, Catalyst 2960G Series, Catalyst 3850 XS 10G SFP+, Catalyst 3750-E Series, HUAWEI S5700Series, H3C S3100V2 Series, Juniper-EX4200, etc.



**Cisco Catalyst 3850**



**HUAWEI S5700**



**H3C S3100V2**



**HP J9264AR**



**Juniper EX 4200**



**Alcatel 6850E-U24X**



**Mikrotik CR5226-24G-25+RM**



**Cisco Catalyst 2960G**



**Volktek MEN-4110**

## Product Production Process

# Quality Assurance

Continuous introduction of new equipment, produced by strict standards, strict quality inspection, to guarantee the high quality standard of each product.



**Standardized  
Production Line**




**Professional  
Welding**



**Assembling**



**Aging Testing**

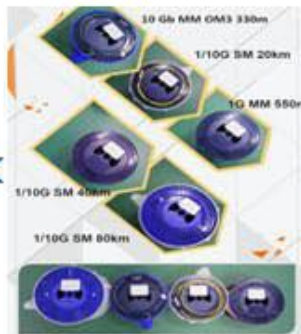

**Distance Testing**



**Cleaning end face**



**Product Initial Test**



**Switch Testing**



**Product Final Test**

## Packaging

ETU-Link provides two kinds of packaging, 10pcs/Tray and individual package.



Company: ETU-Link Technology Co., LTD

Address: 4th Floor, C Building, JinBoLong Industrial Park, QingQuan Road, LongHua District,  
Shenzhen city, GuangDong

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at [www.etulinktechnology.com](http://www.etulinktechnology.com).

Please e-mail us at [sales@etulinktechnology.com](mailto:sales@etulinktechnology.com) or call us for assistance.