

## ESDxxX-80D(I)-R

10Gb/s SFP+ DWDM 80km DDM Transceiver

### PRODUCT FEATURES

- Dual CDR with 9.8 to 11.3Gb/s
- Support 80 km link distances
- Temperature-Stabilized DWDM EML Transmitter and APD Receiver
- Duplex LC connector
- Low power consumption:  
Commercial:<1.5W  
Industrial: <1.8W
- Positive power supply lines: 3.3 V
- Operating case temperature range:  
Commercial:0 to 70°C  
Industrial: -40 to 85°C
- RoHS 6 compliant
- Compliant with SFF-8431 / SFF-8472



### APPLICATIONS


- DWDM 10Gb/s Ethernet
- OTU2/2e
- Other Optical Links

## Description

The ESDxxX-80D(I)-R series single mode transceiver is small form factor pluggable module for duplex optical data communications such as 10GBASE-ZR defined by IEEE 802.3. The ESDxxX-80D(I)-R module is designed for single mode fiber and operates at a nominal wavelength of 1528.77nm to 1563.86nm; the transmitter section uses a multiple quantum well EML, which is class 1 laser compliant according to International Safety Standard IEC-60825.

The SFP+ 80km module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI

## Module Block Diagram

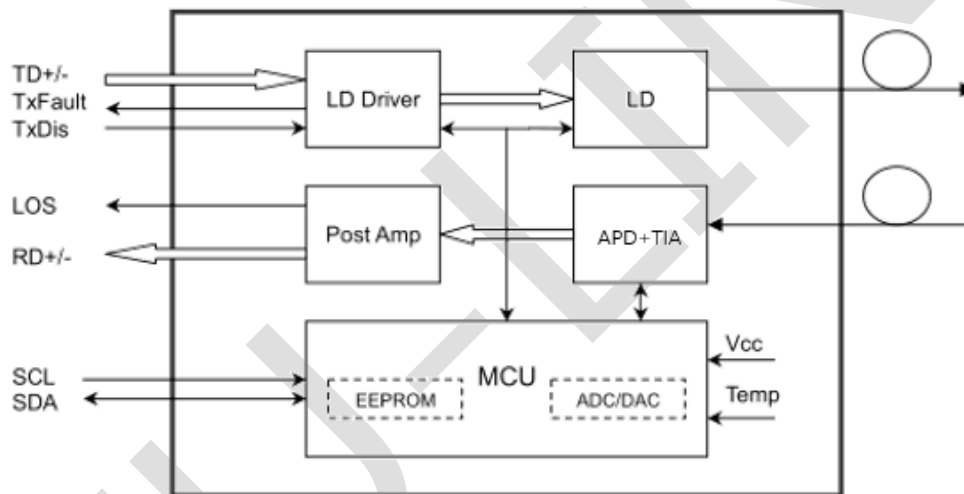

## Ordering information

| Part No.      | Data Rate(optical) | Laser | Fiber Type | Distance | Optical Interface | Temp   | DDMI |
|---------------|--------------------|-------|------------|----------|-------------------|--------|------|
| ESDxxX-80D-R  | 10.3125Gbps        | EML   | SMF        | 80km     | LC                | 0~70°C | Y    |
| ESDxxX-80DI-R | 10.3125Gbps        | EML   | SMF        | 80km     | LC                | 0~70°C | Y    |

## Wavelength Guide Table

| Channel | Wavelength (nm) | Frequency (THZ) | Channel | Wavelength (nm) | Frequency (THZ) |
|---------|-----------------|-----------------|---------|-----------------|-----------------|
| C17     | 1563.86         | 191.70          | C39     | 1546.12         | 193.90          |
| C18     | 1563.05         | 191.80          | C40     | 1545.32         | 194.00          |

|                |                                                  |        |            |         |        |
|----------------|--------------------------------------------------|--------|------------|---------|--------|
| <b>C19</b>     | 1562.23                                          | 191.90 | <b>C41</b> | 1544.53 | 194.10 |
| <b>C20</b>     | 1561.42                                          | 192.00 | <b>C42</b> | 1543.73 | 194.20 |
| <b>C21</b>     | 1560.61                                          | 192.10 | <b>C43</b> | 1542.94 | 194.30 |
| <b>C22</b>     | 1559.79                                          | 192.20 | <b>C44</b> | 1542.14 | 194.40 |
| <b>C23</b>     | 1558.98                                          | 192.30 | <b>C45</b> | 1541.35 | 194.50 |
| <b>C24</b>     | 1558.17                                          | 192.40 | <b>C46</b> | 1540.56 | 194.60 |
| <b>C25</b>     | 1557.36                                          | 192.50 | <b>C47</b> | 1539.77 | 194.70 |
| <b>C26</b>     | 1556.55                                          | 192.60 | <b>C48</b> | 1538.98 | 194.80 |
| <b>C27</b>     | 1555.75                                          | 192.70 | <b>C49</b> | 1538.19 | 194.90 |
| <b>C28</b>     | 1554.94                                          | 192.80 | <b>C50</b> | 1537.40 | 195.00 |
| <b>C29</b>     | 1554.13                                          | 192.90 | <b>C51</b> | 1536.61 | 195.10 |
| <b>C30</b>     | 1553.33                                          | 193.00 | <b>C52</b> | 1535.82 | 195.20 |
| <b>C31</b>     | 1552.52                                          | 193.10 | <b>C53</b> | 1535.04 | 195.30 |
| <b>C32</b>     | 1551.72                                          | 193.20 | <b>C54</b> | 1534.25 | 195.40 |
| <b>C33</b>     | 1550.92                                          | 193.30 | <b>C55</b> | 1533.47 | 195.50 |
| <b>C34</b>     | 1550.12                                          | 193.40 | <b>C56</b> | 1532.68 | 195.60 |
| <b>C35</b>     | 1549.32                                          | 193.50 | <b>C57</b> | 1531.90 | 195.70 |
| <b>C36</b>     | 1548.51                                          | 193.60 | <b>C58</b> | 1531.12 | 195.80 |
| <b>C37</b>     | 1547.72                                          | 193.70 | <b>C59</b> | 1530.33 | 195.90 |
| <b>C38</b>     | 1546.92                                          | 193.80 | <b>C60</b> | 1529.55 | 196.00 |
| <b>Non-ITU</b> | <b>Peak wavelength between 1528.77nm-1563.86</b> |        | <b>C61</b> | 1528.77 | 196.10 |

## Absolute Maximum Ratings

| Parameter                     | Symbol           | Min  | Typ | Max | Units |
|-------------------------------|------------------|------|-----|-----|-------|
| Storage Temperature           | T <sub>stg</sub> | -40  | -   | 85  | °C    |
| Relative Humidity - Storage   | RH <sub>o</sub>  | 5    | -   | 95  | %     |
| Relative Humidity - Operating | RH <sub>s</sub>  | 5    | -   | 85  | %     |
| Power Supply                  | V <sub>cc</sub>  | -0.5 | -   | 3.6 | V     |

## Recommended Operating Conditions

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|-----------|--------|-----|-----|-----|-------|-------|
|-----------|--------|-----|-----|-----|-------|-------|

|                            |                 |      |    |      |    |                       |
|----------------------------|-----------------|------|----|------|----|-----------------------|
| Case Operating Temperature |                 | -40  | 25 | 85   | °C | Temperature Range = I |
| Case Operating Temperature |                 | 0    | 25 | 70   | °C | Temperature Range = C |
| DC Supply Voltage          | V <sub>CC</sub> | 3.13 | -  | 3.47 | V  |                       |
| Transmission Distance      | TD              | -    | -  | 80   | km | Over SMF              |

## Electrical Characteristics

High-Speed Signal: Compliant to CEI-11G-SR

Low-Speed Signal: Compliant to SFF-8419

| Parameter                                    |                  | Symbol             | Min.  | Typical | Max.                 | Unit | Notes      |
|----------------------------------------------|------------------|--------------------|-------|---------|----------------------|------|------------|
| Supply Voltage                               |                  | V <sub>CC</sub>    | 3.135 |         | 3.465                | V    |            |
| Supply Current                               |                  | I <sub>CC</sub>    |       |         | 450                  | mA   | Commercial |
|                                              |                  |                    |       |         | 540                  |      | Industrial |
| Power Consumption                            |                  | P                  |       |         | 1.5                  | W    | Commercial |
|                                              |                  |                    |       |         | 1.8                  |      | Industrial |
| Transmitter (Module Input)                   |                  |                    |       |         |                      |      |            |
| Differential Input Resistance                |                  | R <sub>Rdin</sub>  | 80    | 100     | 120                  | Ω    |            |
| Input Differential Voltage                   |                  | R <sub>Vdiff</sub> | 110   | -       | 1050                 | mVpp |            |
| Tx_Disable                                   | Normal Operation | V <sub>IL</sub>    | -0.3  | -       | 0.8                  | V    |            |
|                                              | Laser Disable    | V <sub>IH</sub>    | 2.0   | -       | V <sub>CC</sub> +0.3 | V    |            |
| Receiver (Module Output)                     |                  |                    |       |         |                      |      |            |
| Differential Resistance                      |                  | T <sub>Rd</sub>    | 80    | 100     | 120                  | Ohm  |            |
| Output Differential Voltage                  |                  | T <sub>Vdiff</sub> | 360   | -       | 770                  | mVpp |            |
| Differential Termination Resistance Mismatch |                  | T <sub>Rdm</sub>   | -     | -       | 5                    | %    |            |
| Rx los                                       | Normal Operation | V <sub>OL</sub>    | -0.3  | -       | 0.4                  | V    |            |
|                                              | Loss Signal      | V <sub>OH</sub>    | 2     |         | V <sub>CC</sub> HOST | V    |            |

## Optical Characteristics

| Parameter                           |  | Symbol | Min.                | Typical        | Max.                | Unit | Notes |
|-------------------------------------|--|--------|---------------------|----------------|---------------------|------|-------|
| Transmitter                         |  |        |                     |                |                     |      |       |
| Average Output Power                |  | POUT   | 0                   |                | 5                   | dBm  | 1     |
| Average Output Power(Laser Off)     |  | POFF   |                     |                | -30                 | dBm  |       |
| Wavelength                          |  | λ      | λ <sub>c</sub> -0.1 | λ <sub>c</sub> | λ <sub>c</sub> +0.1 | nm   |       |
| Center Wavelength Spacing           |  |        |                     | 100            |                     | GHz  | 4     |
| Spectrum Bandwidth @ -20dB          |  | Δλ     |                     |                | 1                   | nm   |       |
| Side mode suppression ratio(SMSR)   |  | SMSR   | 30                  |                |                     | dB   |       |
| Extinction ratio                    |  | ER     | 8.2                 |                |                     | dB   |       |
| Transmitter waveform and dispersion |  |        |                     |                | 4.7                 | dB   |       |

|                               |                          |      |    |      |       |   |
|-------------------------------|--------------------------|------|----|------|-------|---|
| penalty (TWDP)                |                          |      |    |      |       |   |
| RIN <sub>20</sub> OMA         | RIN                      |      |    | -128 | dB/Hz | 2 |
| Optical return loss tolerance | ORLT                     | 20   |    |      | dB    |   |
| <b>Receiver</b>               |                          |      |    |      |       |   |
| Wavelength                    | $\lambda$                | 1260 |    | 1620 | nm    |   |
| Received Sensitivity          | P <sub>IN</sub>          |      |    | -23  | dBm   | 3 |
| Optical Power Overload        | P <sub>IN</sub><br>(SAT) | -6   |    |      | dBm   |   |
| Damage threshold              |                          |      | -5 |      | dBm   |   |
| Receiver Reflectance          | RFL                      |      |    | -12  | dB    |   |
| Rx_LOS of Signal Assert       | P <sub>A</sub>           | -40  |    |      | dBm   |   |
| Rx_LOS of Signal De-assert    | P <sub>D</sub>           |      |    | -25  | dBm   |   |
| Rx_LOS of Signal Hysteresis   | P <sub>Hy</sub>          | 0.5  |    | 5    | dB    |   |
| Optical Return Loss Tolerance | ORLT                     | 20   |    |      | dB    |   |

Notes:


1. Output is coupled into a 9/125um SMF.
2. 12dB reflection.
3. Measured with worst ER, BER less than 1E-12 and PRBS 2<sup>31</sup>-1 at 10.3125Gbps.
4. Corresponds to approximately 0.8 nm.

## Digital Diagnostic Monitor Accuracy

The following characteristics are defined over recommended operating condition

| Parameter       | Range     | Accuracy | Unit | Calibration |
|-----------------|-----------|----------|------|-------------|
| Temperature     | -40 to 85 | ±3       | °C   | Internal    |
| Voltage         | 3 to 3.6  | ±3%      | V    | Internal    |
| Tx Bias Current | 0 to 100  | ±10%     | mA   | Internal    |
| Tx Output Power | 0 to 4    | ±3       | dB   | Internal    |
| Rx Input Power  | -23 to -6 | ±3       | dB   | Internal    |

## Pin Diagram

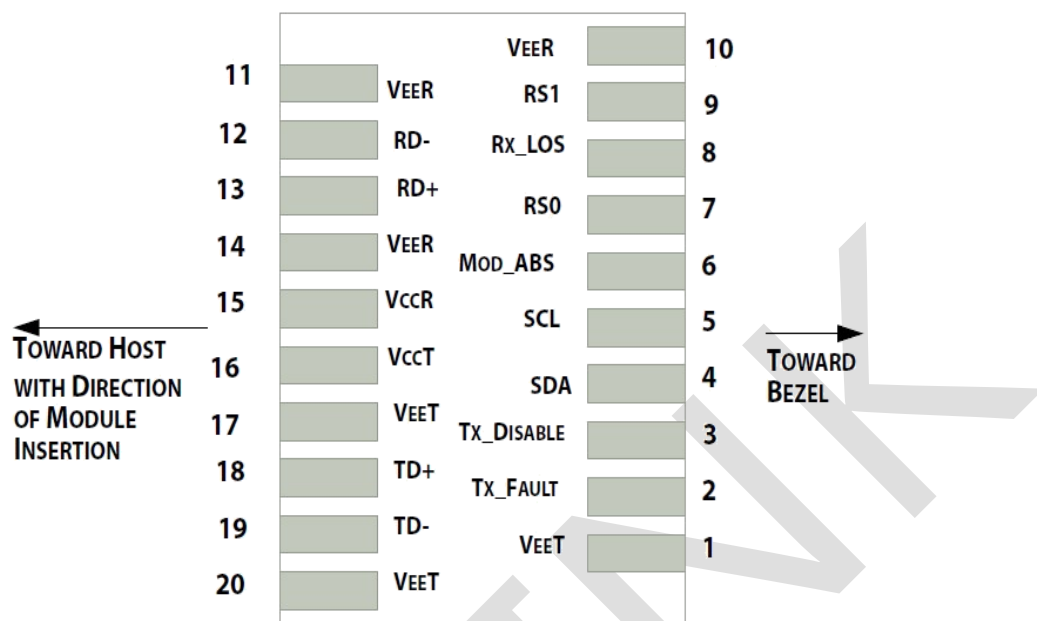


## Pin Descriptions

| PIN # | Name       | Function                                                                                                                    | Notes |
|-------|------------|-----------------------------------------------------------------------------------------------------------------------------|-------|
| 1     | VeeT       | Module transmitter ground                                                                                                   | 1     |
| 2     | Tx Fault   | Module transmitter fault                                                                                                    | 2     |
| 3     | Tx Disable | Transmitter Disable; Turns off transmitter laser output                                                                     | 3     |
| 4     | SDL        | 2 wire serial interface data input/output (SDA)                                                                             | 4     |
| 5     | SCL        | 2 wire serial interface clock input (SCL)                                                                                   | 4     |
| 6     | MOD-ABS    | Module Absent, connect to VeeR or VeeT in the module                                                                        | 4     |
| 7     | RS0        | Rate select0, optionally control SFP+ receiver. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s    | 5     |
| 8     | LOS        | Receiver Loss of Signal Indication                                                                                          | 6     |
| 9     | RS1        | Rate select0, optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s | 1     |
| 10    | VeeR       | Module receiver ground                                                                                                      | 1     |
| 11    | VeeR       | Module receiver ground                                                                                                      | 1     |
| 12    | RD-        | Receiver inverted data output                                                                                               |       |
| 13    | RD+        | Receiver non-inverted data output                                                                                           |       |
| 14    | VeeR       | Module receiver ground                                                                                                      | 1     |
| 15    | VccR       | Module receiver 3.3V supply                                                                                                 |       |
| 16    | VccT       | Module transmitter 3.3V supply                                                                                              |       |
| 17    | VeeT       | Module transmitter ground                                                                                                   | 1     |
| 18    | TD+        | Transmitter inverted data output                                                                                            |       |
| 19    | TD-        | Transmitter non-inverted data output                                                                                        |       |
| 20    | VeeT       | Module transmitter ground                                                                                                   | 1     |


Notes:

1. Circuit ground is internally isolated from chassis ground
2. Tx FAULT is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on Tx DIS >2.0V or open, enabled on Tx DIS <0.8V.
4. Should be pulled up with 4.7kΩ- 10kΩ host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## Recommend Circuit Schematic

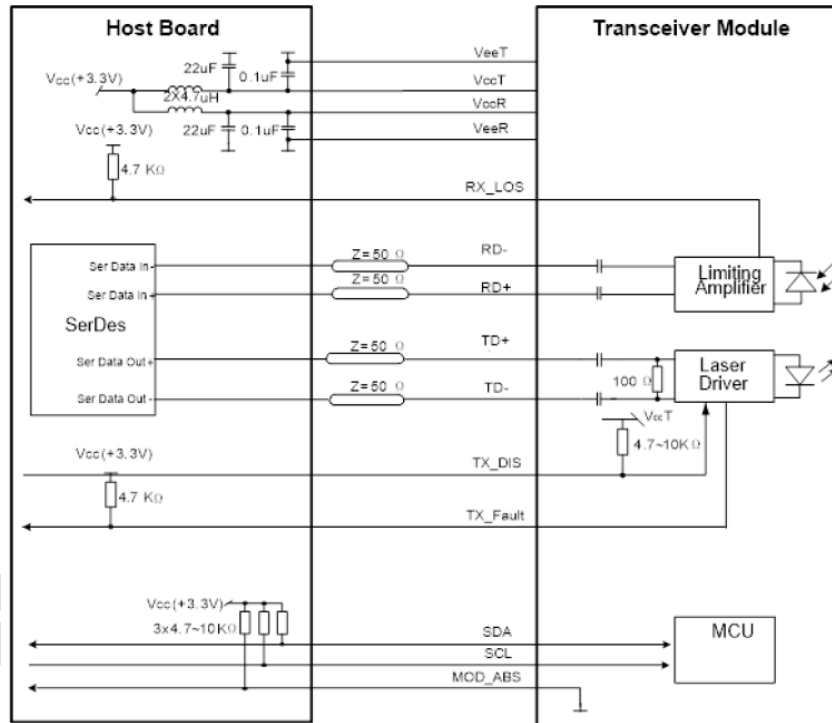

Mechanical Specifications(Unit: mm)

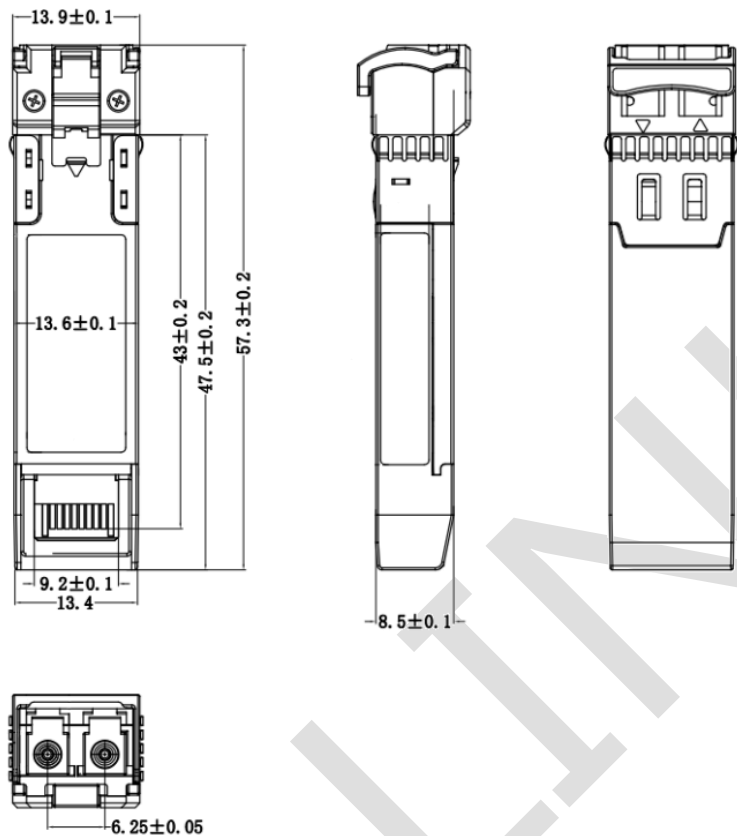

Revision History

| Version No. | Date               | Description            |
|-------------|--------------------|------------------------|
| 1.0         | May 28 2022        | Preliminary datasheet  |
| 2.0         | Nov 25 2023        | Product upgrades       |
| 2.1         | Aug 08, 2024       | Format change          |
| 2.2         | November 28th,2025 | Change LOS_A to -40dBm |

Company: ETU-Link Technology Co., LTD  
Production base: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street, Longhua District, Shenzhen city, GuangDongProvince,China 518109  
R&D base: Floor 4, Building 4, Nanshan Yungu Phase LI, Taoyuan Community, XiliStreet,Nanshan District, Shenzhen  
Tel: +86-755 2328 4603

Addresses and phone number also have been listed at [www.etulinktechnology.com](http://www.etulinktechnology.com).  
Please e-mail us at [sales@etulinktechnology.com](mailto:sales@etulinktechnology.com) or call us for assistance.