

ESTxxX-80D(I) Tunable

10Gb/s Tunable DWDM 80km SFP+ Transceiver

PRODUCT FEATURES

- Supports 9.95Gb/s to 11.3Gb/s bit rates
- Monolithically integrated full C-band tunable transmitter and APD receiver
- 100 GHz ITU channel spacing with integrated wavelength locker
- Up to 80km on 9/125μm SMF
- Hot-pluggable SFP+ footprint
- Compliant with SFP+ MSA with LC connector
- Metal enclosure, for lower EMI
- RoHS-10 compliant and lead-free
- Support Digital Diagnostic Monitoring interface
- Specifications compliant with SFF-8472 V11.3& SFF-8690 V1.4
- Single +3.3V power supply
- Temperature Range:
 - Commercial: 0°C ~70°C
 - Industrial: -40°C ~85°C



APPLICATIONS

- DWDM 10GBASE-ZR/ZW & 10G Ethernet
- DWDM SONET OC-192&SDH STM-64
- 10G Fiber Channel
-

DESCRIPTIONS

The ETU-Link tunable transceiver is an integrated fiber optic transceiver that provides a high-speed serial link at signaling rates from 9.95 Gb/s to 11.3 Gb/s. The module complies with the 10 Gigabit Enhanced Small Form Factor Pluggable (SFP+) multisource agreement-MSA (SFF-8431) and SFF-8432, SFF-8690, SFF-8472. It complies with the ITU-T G.698.1 standard with 100 GHz channel spacing for SONET/SDH, IEEE DWDM 10GBASE-ZR for 80 km reach (Ethernet), and DWDM 10GFC for 80 km reach (Fiber Channel) applications.

The transceiver integrates the receiver and transmitter path on one module. The transceiver contains a C-band-tunable integrated Mach-Zehnder (MZ) laser, enabling data transmission over single-mode fiber through an industry-standard LC connector. On the receiver side, the 10 Gbps data stream is recovered from an APD/ trans-impedance amplifier, and passed to an output driver. This module features a hot-pluggable electrical interface.

ETU transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, and received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP+ MSA defines a 256-byte memory map in EEPROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged.

Ordering Information

Part No.	Data Rate(optical)	Laser	Fiber Type	Distance	Optical Interface	Temp	DDMI	Latch Color
ESTxxX-80D	10.3125Gbps	EML	SMF	80km	LC	0~70°C	Y	Green
ESTxxX-80DI	10.3125Gbps	EML	SMF	80km	LC	-40~85°C	Y	Green

Wavelength Selection: C-band λ c Wavelength Guide Pin Descriptions

Channel	Wavelength (nm)	Frequency (THZ)	Channel	Wavelength (nm)	Frequency (THZ)
1	1566.31	191.4	26	1546.12	193.9
2	1565.5	191.5	27	1545.32	194
3	1564.68	191.6	28	1544.53	194.1
4	1563.86	191.7	29	1543.73	194.2
5	1563.05	191.8	30	1542.94	194.3
6	1562.23	191.9	31	1542.14	194.4
7	1561.42	192	32	1541.35	194.5
8	1560.61	192.1	33	1540.56	194.6
9	1559.79	192.2	34	1539.77	194.7

10	1558.98	192.3	35	1538.98	194.8
11	1558.17	192.4	36	1538.19	194.9
12	1557.36	192.5	37	1537.4	195
13	1556.55	192.6	38	1536.61	195.1
14	1555.75	192.7	39	1535.82	195.2
15	1554.94	192.8	40	1535.04	195.3
16	1554.13	192.9	41	1534.25	195.4
17	1553.33	193	42	1533.47	195.5
18	1552.52	193.1	43	1532.68	195.6
19	1551.72	193.2	44	1531.9	195.7
20	1550.92	193.3	45	1531.12	195.8
21	1550.12	193.4	46	1530.33	195.9
22	1549.32	193.5	47	1529.55	196
23	1548.51	193.6	48	1528.77	196.1
24	1547.72	193.7			
25	1546.92	193.8			

Notes:

1. When a tunable module is plugged in for the first time, it will go to a default channel, ETU default channel is 1568.36nm, compatible with channel range from 1 to 48
2. When the module is power cycled it will automatically go to the last channel selected, or when Tx _Disable asserted and then re-enabled, the module returns to the last channel selected.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	T _s	-40		85	°C	
Power Supply Voltage	V _{CC}	-0.5		3.6	V	
Relative Humidity (non-condensation)	RH	5		95	%	
Damage Threshold	TH _d	0			dBm	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Case Operating Temperature	Top	0	-	70	°C	Commercial
		-40		85		Industrial
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Data Rate			10.3125		Gb/s	
Control Input Voltage High		2		V _{CC}	V	
Control Input Voltage Low		0		0.8	V	

Link Distance (SMF)	D			80	km	9/125um
---------------------	---	--	--	----	----	---------

Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Power Consumption	p			2	W	
Supply Current	I _{cc}			606	mA	
Transmitter (Module Input)						
Single-ended Input Voltage Tolerance	V _{cc}	-0.3		4.0	V	
AC Common Mode Input Voltage Tolerance (RMS)		15			mV	
Differential Input Voltage Swing	V _{in,pp}	240		910	mV _{pp}	
Differential Input Impedance	Z _{in}	90	100	110	Ohm	1
Transmit Disable Assert Time				10	us	
Transmit Disable Voltage	V _{dis}	V _{cc} -1.3		V _{cc}	V	
Transmit Enable Voltage	V _{en}	V _{ee}		V _{ee} +0.8	V	2
Receiver (Module Output)						
Differential Output Voltage Swing	V _{out,pp}	350		800	mV _{pp}	
Differential Output Impedance	Z _{out}	90	100	110	Ohm	3
Data output rise/fall time	Tr/Tf	30			ps	4
LOS Assert Voltage	V _{losH}	V _{cc} -1.3		V _{cc}	V	5
LOS De-assert Voltage	V _{losL}	V _{ee}		V _{ee} +0.8	V	5
Power Supply Rejection	PSR	100			mV _{pp}	6

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Input 100 ohms differential termination.
4. These are unfiltered 20-80% values.
5. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

Optical and Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter						
Center Wavelength	λ _{c_BOL}	z-1.5	z	Z+1.5	GHz	
Center Wavelength	λ _{c_EOL}	z-2.5	z	Z+2.5	GHz	
Center Wavelength Spacing			100		GHz	

Optical Communications Products Alliance

Optical Spectral Width	$\Delta\lambda$			1	nm	
Side Mode Suppression Ratio	SMSR	35			dB	
Average Optical Power	P _{AVG}	-1		4	dBm	1
Optical Extinction Ratio	ER	8.2			dB	
Transmitter and Dispersion Penalty	TDP			3	dB	
Frequency stability (EOL)	-2.5			2.5	GHz	
Transmitter Eye Mask		Compliant with IEEE802.3ae				
Receiver						
Center Wavelength	λ_c	1270		1610	nm	
Receiver Sensitivity(Average power)	Sen.			-23	dBm	2
Input Saturation Power (overload)	Psat	-6			dBm	
LOS Assert	LOSA	-36			dB	
LOS De-assert	LOSD			-27	dBm	
LOS Hysteresis	LOSH	0.5			dBm	


Notes:

1. Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.
2. Measured with Light source 1529.16~1568.36nm, ER=6.0dB; BER =<10⁻¹² @10.3125Gbps, PRBS=2³¹-1 NRZ.

Digital Diagnostics

Parameter	Symbol	Min.	Max	Unit	Notes
Temperature monitor absolute error	DMI_Temp	-3	3	degC	Over operating temp
Supply voltage monitor absolute error	DMI_VCC	-0.1	0.1	V	Full operating range
RX power monitor absolute error	DMI_RX	-3	3	dB	
Bias current monitor	DMI_bias	-10%	10%	mA	
TX power monitor absolute error	DMI_TX	-3	3	dB	

Pin Diagram

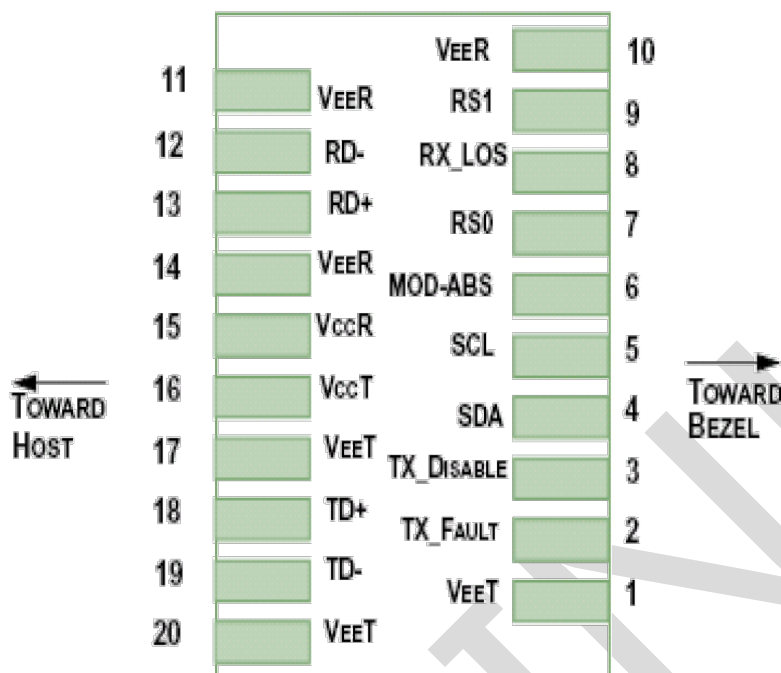


Pin Definitions

PIN #	Name	Function	Notes
1	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
2	T_{FAULT}	Transmitter Fault.	2
3	T_{DIS}	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	Rate Select 0	5
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	6
9	RS1	No connection required	
10	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
11	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
15	V_{CCR}	Receiver Power Supply	
16	V_{CCT}	Transmitter Power Supply	
17	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1


Notes:

1. Circuit ground is internally isolated from chassis ground.
2. TFAULT is an open collector/drain output, which should be pulled up with a 4.7k Ω -10 k Ω resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
4. Should be pulled up with 4.7k Ω -10k Ω on host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7k Ω -10k Ω on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Recommended Interface Circuit

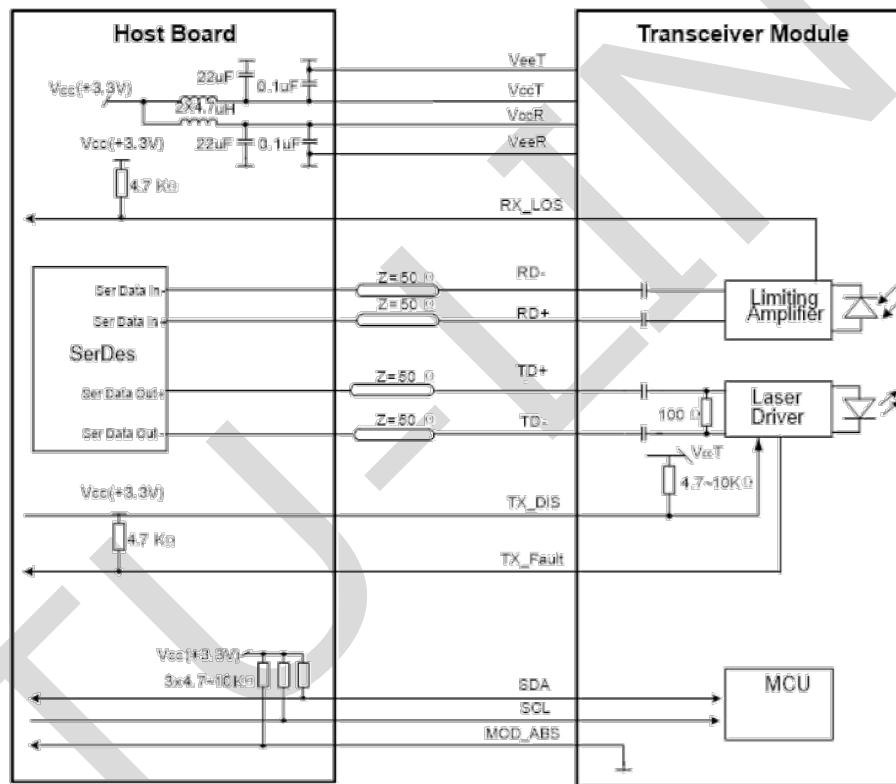

Mechanical Diagram

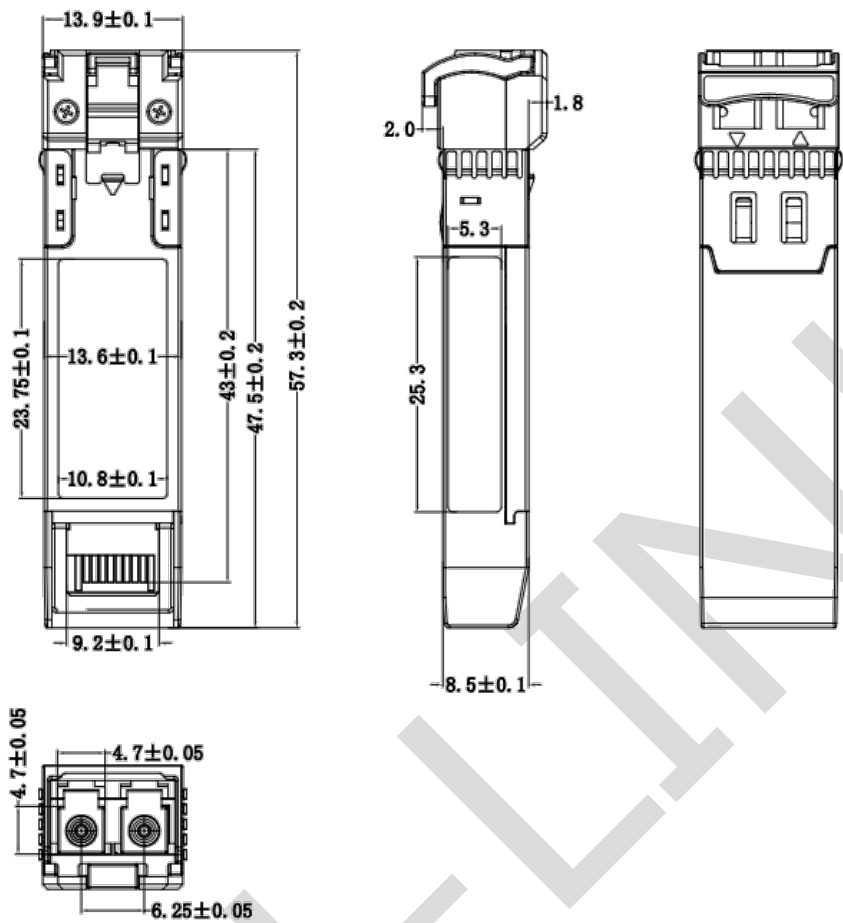

Revision History

Version No.	Date	Description
1.0	July 26, 2023	Preliminary datasheet
2.0	September 27, 2024	Format change

Company: ETU-Link Technology Co., LTD
Production base: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street, Longhua District, Shenzhen city, GuangdongProvince,China 518109
R&D base: Floor 4, Building 4, Nanshan Yungu Phase LI, Taoyuan Community, XiliStreet,Nanshan District, Shenzhen
Tel: +86-755 2328 4603

Addresses and phone number also have been listed at www.etulinktechnology.com.
Please e-mail us at sales@etulinktechnology.com or call us for assistance.