
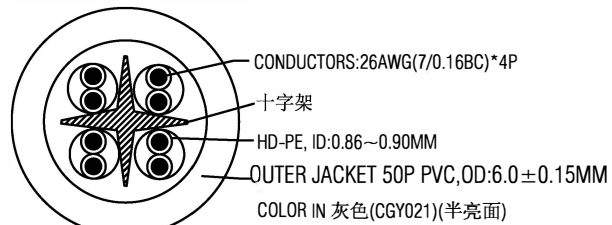



模具名称
外模

模具编号

客户名称

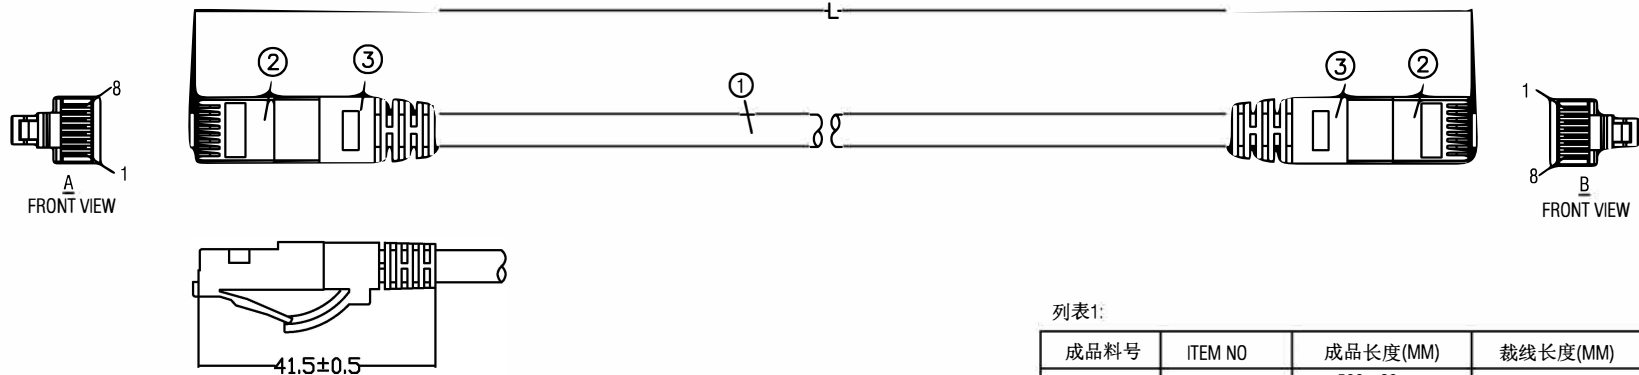

SPECIFICATION

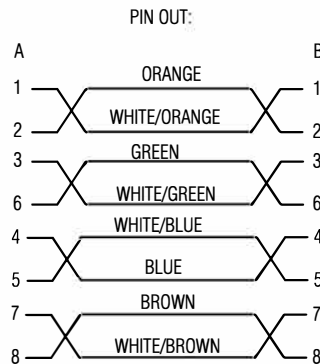

列表1:

成品料号	ITEM NO	成品长度(MM)	裁线长度(MM)
		500±30	
		1000±50	
		2000±50	
		3000±50	
		5000±50	
		10000±100	
		15000±100	
		20000±150	
		25000±150	
		30000±200	
		35000±200	
		50000±200	

NOTES:

- 1.ELECTRICAL TEST: 100% OPEN,SHORT & MISS WIRE TEST.
- 2.CONDUCTOR RESISTANCE: 10 OHMS MAX.
- 3.INSULATOR RESISTANCE: 8M OHM MIN.
- 4.HI POT: DC300V/0.01S.
- 5.PRINTING WORD OF CABLE: CAT 6 UTP PATCH CABLE 26WG 4PR TIA/EIA-568B

ETU-Link Technology Co., LTD

DESCRIPTION:	ASSEMBLY FOR CAT6 CABLE RJ45-RJ45			
DRAWN NO.	2057C6GY001-022	ITEM NO.	C6-GY-XXFT	PAGE: 1 OF 1
DRAWN BY:	HX	UNIT:	mm	SCALE: NONE
CHECKED BY:		DATE:	20210723	TOLER: ±0.20
APPVL BY:				REV: 1.0

NO.	材料料号	材料具体规格	用量
③	41350PGY008	外模胶料:50P PVC 灰色(CGY021) 比重<1.45	0.01KG
②	40688ML0096	水晶头[8P8C/M 长身透明4上4下一体式,三叉金片,圆孔,pin针镀金Fu",线孔为0.95mm]	2PCS
①		CAT.6 UTP网线:26AWG(7/0.16BC*4P+"十字架,灰色(CGY021) PVC外被 OD:6.0MM.印字	1PCS
REV	DESCRIPTION	DATE	
1.0	DRAWING ISSUE	20210723	