

EDOP800-xx

800Gbps OSFP112 Passive High Speed Cable

PRODUCT FEATURES

- **Products Compliance with SFF-8636, OSFP_MSA**
- **Ethernet-Compliance with IEEE802.3ck**
- **Support 112G (PAM4) electrical data rates/channel**
- **Support I2C two - line string interface, easy to control**
- **Support for hot plugging**
- **Low crosstalk/Low power**
- **Maximum Link Length: up to 2m**
- **ROHS Compliance**

APPLICATIONS

- **800G Ethernet**
- **SWITCH/Router**
- **Data storage and communication industry**
- **Data center, cloud server**

Description

The 800G OSFP112 Passive Direct Attach Copper Twinax Cable is designed for use in 800GBASE Ethernet. QSFP112 is the module and cage/connector system based on current OSFP, targeting to support the 112Gb/s per lane speed in a 8x lane OSFP system and to enable the QSFP 800G interconnect ecosystem. This will greatly help the legacy OSFP users upgrade the link bandwidth to 800G per port with lower cost and shorter transition time.

Information

Part No.	Description
EDOP800-xx-30	400Gbps OSFP To QSFPDD Passive High Speed Cable 30AWG 0.5~1M
EDOP800-xx-30	400Gbps OSFP To QSFPDD Passive High Speed Cable 28AWG 1.5~2M

Notes:


- where "x" denotes cable length in meters. Examples are as follows:
- x = 1 for 1m,

Wiring Diagram

P1			P2	
GND	1		31	GND
TX2+	2	↔	32	RX2+
TX2-	3	↔	33	RX2-
GND	4		34	GND
TX4+	5	↔	35	RX4+
TX4-	6	↔	36	RX4-
GND	7		37	GND
TX6+	8	↔	38	RX6+
TX6-	9	↔	39	RX6-
GND	10		40	GND
TX8+	11	↔	41	RX8+
TX8-	12	↔	42	RX8-
GND	13		43	GND
SCL	14		44	INT/RSTn
VCC	15		45	VCC
VCC	16		46	VCC
LPWh/PRSn	17		47	SDA
GND	18		48	GND
RX7-	19	↔	49	TX7-
RX7+	20	↔	50	TX7+
GND	21		51	GND
RX5-	22	↔	52	TX5-
RX5+	23	↔	53	TX5+
GND	24		54	GND
RX3-	25	↔	55	TX3-
RX3+	26	↔	56	TX3+
GND	27		57	GND
RX1-	28	↔	58	TX1-
RX1+	29	↔	59	TX1+
GND	30		60	GND

P1			P2	
GND	31		1	GND
RX2+	32	↔	2	TX2+
RX2-	33	↔	3	TX2-
GND	34		4	GND
RX4+	35	↔	5	TX4+
RX4-	36	↔	6	TX4-
GND	37		7	GND
RX6+	38	↔	8	TX6+
RX6-	39	↔	9	TX6-
GND	40		10	GND
RX8+	41	↔	11	TX8+
RX8-	42	↔	12	TX8-
GND	43		13	GND
INT/RSTn	44		14	SCL
VCC	45		15	VCC
VCC	46		16	VCC
SDA	47		17	LPWh/PRSn
GND	48		18	GND
TX7-	49	↔	19	RX7-
TX7+	50	↔	20	RX7+
GND	51		21	GND
TX5-	52	↔	22	RX5-
TX5+	53	↔	23	RX5+
GND	54		24	GND
TX3-	55	↔	25	RX3-
TX3+	56	↔	26	RX3+
GND	57		27	GND
TX1-	58	↔	28	RX1-
TX1+	59	↔	29	RX1+
GND	60		30	GND

PINOUT

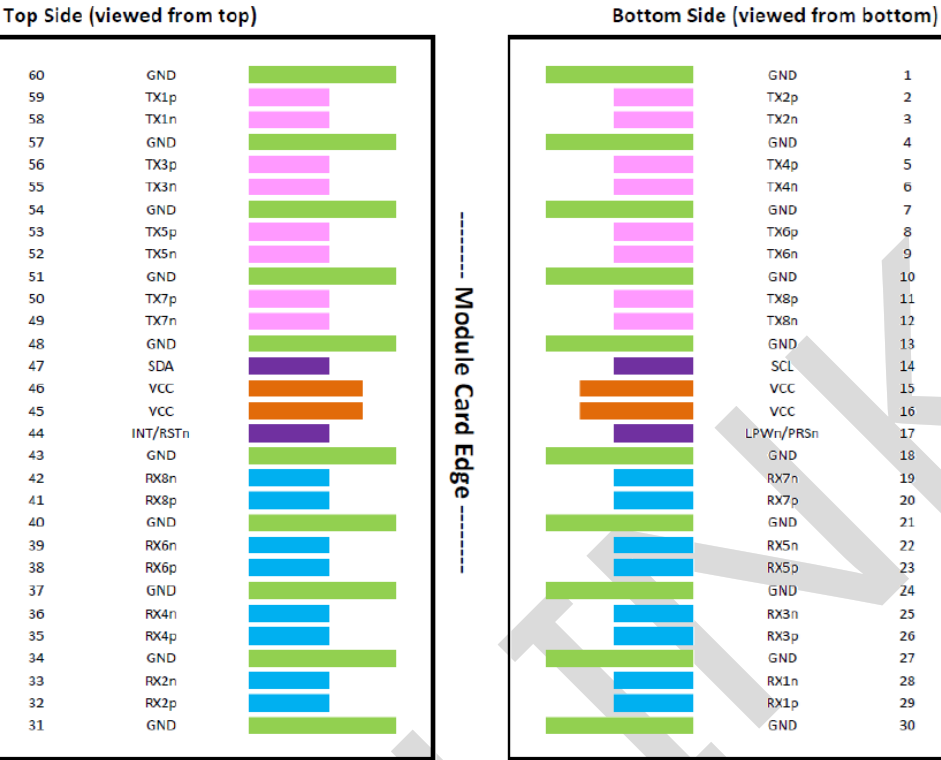

Electrical Performance

Signal Integrity

ITEM		REQUIREMENT	(TEST CONDITION)
(Differential Impedance)	Cable Impedance	100±5Ω	Rise time of 25ps (20 % - 80 %).
	Paddle Card Impedance	100±10Ω	
	Cable Termination Impedance	100±10Ω	
[Differential (Input/Output)Return loss S _{DD11} /S _{DD22}]		Return_loss(f)≥ $\left\{ \begin{array}{ll} 16.5-2\sqrt{f} & 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1 \leq f \leq 40 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the return loss at frequency f	10MHz≤f≤40GHz
[Differential to common-mode (Input/Output)Return loss S _{CD11} /S _{CD22}]		Return_loss(f)≥ $\left\{ \begin{array}{ll} 22-10(f/26.56) & 0.05 \leq f < 26.56 \\ 15-3(f/26.56) & 26.56 \leq f \leq 40 \end{array} \right\}$	50MHz≤f≤40GHz

	Where f is the frequency in GHz Return_loss(f) is the Differential to common-mode return loss at frequency f	
[Common-mode to Common-mode (Input/Output)Return loss S_{CC11}/S_{CC22}]	$Return_loss(f) \geq 1.8\text{dB}$ $0.05 \leq f \leq 40$ Where f is the frequency in GHz Return_loss(f) is the common-mode to common-mode return loss at frequency f	$50\text{MHz} \leq f \leq 40\text{GHz}$
[Differential Insertion Loss (S_{DD21} Max.)]	(Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture) $Insertion_loss(f) \geq -19.75\text{dB}$ $0.05 \leq f \leq 26.56$ Where f is the frequency in GHz Insertion Loss (f) Differential Insertion Loss at frequency f	$50\text{MHz} \leq f \leq 40\text{GHz}$
[Insertion Loss Deviation]	$-0.176*f - 0.7 \leq \text{ILD} \leq 0.176*f + 0.7$	$50\text{MHz} \leq f \leq 26.56\text{GHz}$
Differential to common-mode Conversion Loss-Differential Insertion Loss($S_{CD21}-S_{DD21}$)	$Conversion_loss(f) - IL(f) \geq \begin{cases} 10 & 0.05 \leq f < 12.89 \\ 14-0.3108f & 12.89 \leq f < 40 \end{cases}$ Where f is the frequency in GHz Conversion_loss(f) is the cable assembly differential to common-mode conversion loss IL(f) is the cable assembly insertion loss	$50\text{MHz} \leq f \leq 40\text{GHz}$
[MDNEXT(multiple disturber near-end crosstalk)]	$\geq 35\text{dB} @ 26.5\text{GHz}$	$10\text{MHz} \leq f \leq 26.5\text{GHz}$
[Intra Skew]	10ps/m,	$10\text{MHz} \leq f \leq 26.5\text{GHz}$

Other Electrical Performance

ITEM	REQUIREMENT	TEST CONDITON
[Low Level Contact Resistance]	70milliohms Max. From initial.	EIA-364-23:Apply a maximum voltage of 20mV And a current of 100 mA.
Insulation Resistance	10Mohm(Min.)	EIA364-21:AC 300V 1minute
[Dielectric Withstanding Voltage]	NO disruptive discharge.	EIA-364-20:Apply a voltage of 300 VDC for 1minute between adjacent terminals And between adjacent terminals and ground.

Environment Performance


ITEM	REQUIREMENT	TEST CONDITON
[Operating Temp. Range]	0°C to +70°C	Cable operating temperature range.
[Storage Temp. Range (in packed condition)]	-40°C to +80°C	Cable storage temperature range in packed condition.
[Thermal Cycling Non-Powered]	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min. dwells
[Salt Spraying]	48 hours salt spraying after shell corrosive area less than 5%.	EIA-364-26
Mixed Flowing Gas	Pass electrical tests per 3.1 after stressing. (For connector only)	EIA-364-35 Class II, 14 days.
Temp. Life	No evidence of physical damage	EIA-364-17C w/ RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
Cable Cold Bend	4H, No evidence of physical damage	Condition: -20°C±2°C, mandrel diameter is 6 times the cable diameter.

Mechanical and Physical Characteristics

ITEM	REQUIREMENT	TEST CONDITON
Vibration	Pass electrical tests per 3.1 after stressing.	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis.
Cable Flex	No evidence of physical damage	Flex cable 180° for 20 cycles (±90° from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
Cable Plug Retention in Cage	125 N Min. No evidence of physical damage	No functional damage to module, connector, or cage with latching mechanism activated. Per OSFP_Specification_Rev5_0 5.0
Cable Retention in Plug	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
Mechanical Shock	Pass electrical tests Per 3.1 after stressing.	Clamp and shock per EIA-364-27B, TC-G, 3 times in 6 directions, 100g, 6ms.

Cable Plug Insertion	40N Max.(55N)	Per OSFP_Specification_Rev5_0 5.0 Module to be inserted into connector and cage with latch mechanism engaged. (55N if the cage has riding heatsink)
Cable plug Extraction	30N Max. (45N)	Per OSFP_Specification_Rev5_0 5.0 Module to be removed from connector and cage with latching mechanism disengaged. (45N if the cage has riding heatsink)
Durability	50 cycles,No evidence of physical damage	Per OSFP_Specification_Rev5_0 5.0, Number of cycles for an individual module, to be tested with cage, connector, and module; latches may be locked out during testing

Outline drawing

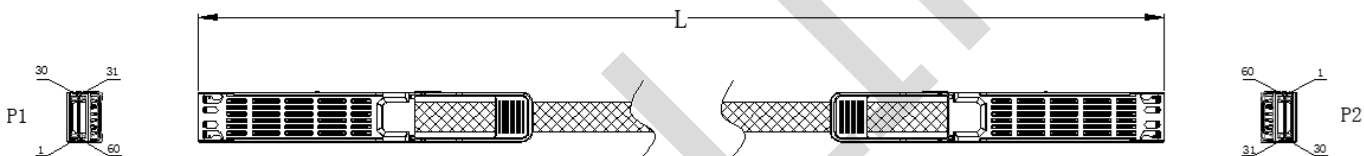

Revision History

Version No.	Date	Description
1.0	February 26, 2024	Preliminary datasheet

Company: ETU-Link Technology Co., LTD

Production base: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street, Longhua District, Shenzhen city, GuangDongProvince,China 518109

R&D base: Floor 4, Building 4, Nanshan Yungu Phase LI, Taoyuan Community, XiliStreet,Nanshan District, Shenzhen

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at www.etulinktechnology.com.
Please e-mail us at sales@etulinktechnology.com or call us for assistance.