

ESI-1100-RJ4S2

2*1000Base-X, 4*10/100/1000Base-T Industrial Switch

Features

- Input Voltage: DC 12-57V
- Operating Temperature: -40°C ~ +80°C
- Case: IP40 protection, fan-less design
- Anti-static level: 8KV-15KV
- MTBF: 300000 Hours

Product Size: **105*74*30MM**

Description

The Ethernet switch uses store-forward architecture, fan-less and energy-saving design. The design complies with the Ethernet standard with lightning and anti-static protection. They apply to the wide range of operating temperature from -40°C to +80°C with stable and reliable performance. They can be widely applied to various broadband data transmission fields, such as intelligent transportation, Telecommunications, security, financial securities, customs, shipping, power, water conservancy and oil fields.

Specification


Port	Fiber	2*1000 Base-X SC/FC/ST/SFP
	RJ45	4*10/100/1000 Base-T
	Power	Phoenix terminal blocks, redundant
Distance	Twisted-pair	0-100meter
	Single mode Optical Fiber	0~100km
	Multi-mode Optical Fiber	550m/2km
Fiber	Wavelength	Dual fiber 850nm, 1310nm, 1550nm Single fiber 1310/1550nm, 1490/1550nm
	Connector	SFP Slot
Networking	Star/Bus/Tree Topology	Support
	Scale	Non-limitation
Power	Input Voltage	DC12-57V



	Power Consumption	<5W
	Forwarding Delay	<5us
	RJ45 Port	Twisted-pair, adaptive
	Jumbo Frame	10K bytes
	Traffic Control	Support
Mechanical Structure	Installation Method	Din-rail
	LED Indicator	PWR,Link/ACT
	Case	Fan-less, natural cooling
Working Environment	Operating Temperature	-40℃~+80℃
	Storage Temperature	-40℃~+80℃
	Relative Humidity	5%~95% (non-condensing)
	MTBF	300,000 Hours
Protection Level	IP Level	IP40
	Power -Surge Protection	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
	Ethernet Surge Protection	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
	EMI	FCC Part 15 Subpart B Class A, EN 55022 Class A
	ESD	IEC 61000--4-2 Level 4 (8K/12K)
	Free-drop	0.5meter
	Anti-static	8KV-12KV



Product Application Diagram

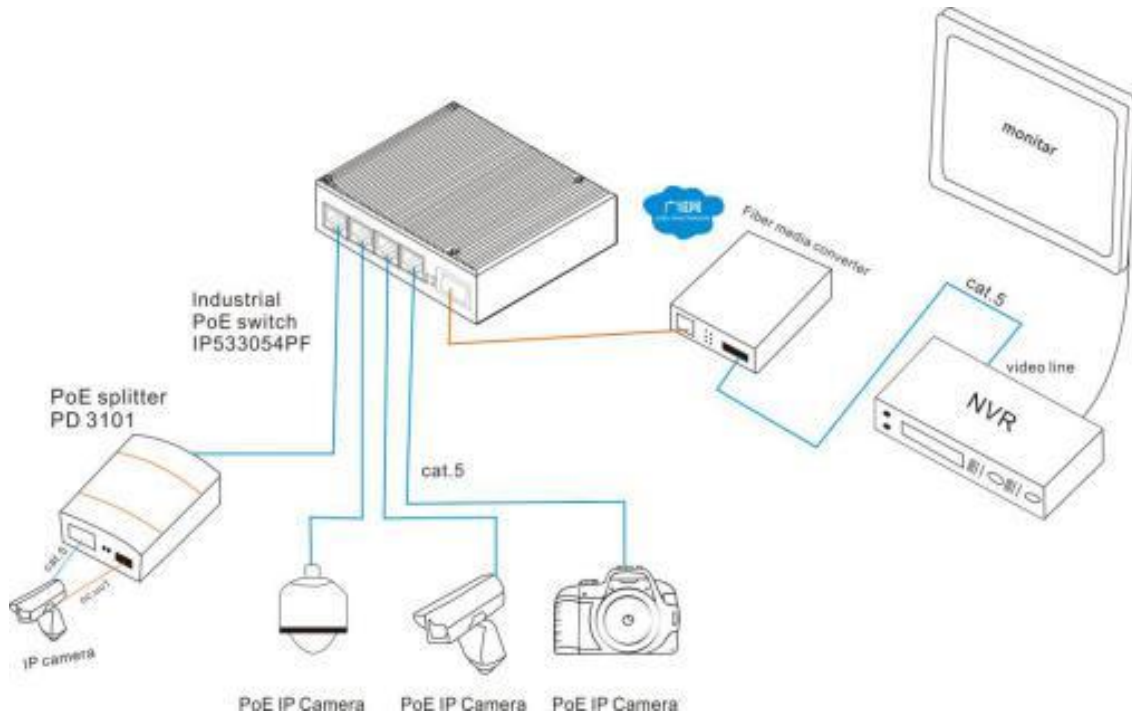

Order Information

10/100/1000M 2Fiber and 4RJ45 (-40~80°C, IP40, Din Rail Mounted, 12-57V)	
ESI-1100-RJ4S2	2SFP+4RJ45, excluding SFP