

30W Gigabit POE Injector

【Introduction】

Gigabit Ethernet POE Injector. The POE port supports a maximum output power of 30W, and the port supports 10/100/1000 self-adaption. Support AC 100-240 V voltage input, working temperature range -20 °C ~ + 50 °C, seamless ultrasonic bonding, better protection effect. Comply with FCC, CE, RoHS standards, reliable hardware design, can ensure your automation system runs without interruption and stability.network

【Main Features】

- Support 1x10/100/1000M POE Port+1x10/100/1000M Ethernet Port
- Comply with IEEE 802.3、IEEE 802.3u、IEEE 802.3ab、Standards;
- Ethernet Port Supports 10/100/1000Mbps adaptive and PoE functions ;
- Support Port Auto Flip (Auto MDI/MDIX)
- Compatible with IEEE802.3af (15.4W)、IEEE802.3at (30w)
- Support AC 100-240 V power supply
- working temperature -20~70° C
- Support wall mount

【Application Environment】

- Metro Optical Broadband Network: Data network operators such as telecommunications, cable TV, and network system integration,etc.
- Broadband private network: Suitable for financial, government, oil, railway, electric power, public security, transportation, education and other industries
- Multimedia transmission: Integrated transmission of images, voice and data, suitable for remote teaching, conference TV, videophone and other applications
- Real-time monitoring: Simultaneous transmission of real-time control signals, images and data

【Specifications】


I/O Interface	
Power	AC 100-240 V
Ethernet	1*10/100/1000Mbps Ethernet Port 1*10/100/1000Mbps PoE Port
Standard	
Network protocol	IEEE802.3 (10Base-T) IEEE802.3u (100Base-TX) IEEE802.3ab (1000Base-TX) IEEE802.3x (Flow control)
PoE protocol	IEEE802.3af (15.4 W)

	IEEE802.3at (25.4 W)
Industry Standard	EMI: FCC Part 15 CISPR (EN55032) class A EMS: EN61000-4-2 (ESD)、EN61000-4-4 (EFT) Shock: IEC 60068-2-27 Free Fall: IEC 60068-2-32 Vibration: IEC 60068-2-6
Network Medium	10Base-T : Cat3、4、5 or above UTP($\leq 100m$) 100Base-TX : Cat5 or above UTP($\leq 100m$) 1000Base-TX : Cat5 or above UTP($\leq 100m$)
Protection	
Security Certificate	CE、FCC、RoHS
Environment	
Working Environment	Working Temperature: $-20\sim 70^{\circ}C$ Storage Temperature: $-40\sim 80^{\circ}C$ Working Humidity : 10%~90%, non-condensing Storage Temperature: 5%~90%, non-condensing Working Height: Maximum 10,000 feet Storage height: Maximum 10,000 feet
Indication	
LED Indicators	PROT
Mechanical	
Structure Size	Product Size: 142* 55*40MM Package Size: 210* 160*55MM Product Net-Weight: 0.2KG Product Gross-Weight: 0.4KG
Packing Info	MEAS: 600*495*435MM Packing Qty: 60PCS Packing weight: 25 KG
Power Voltage	Input Voltage: AC 100-240 V
Package List	PoE Injector * 1 pair User Manual * 1 pcs Power Cable * 1pcs
Ordering Info	
	30W Gigabit POE Injector

【Panel description】



【Application】

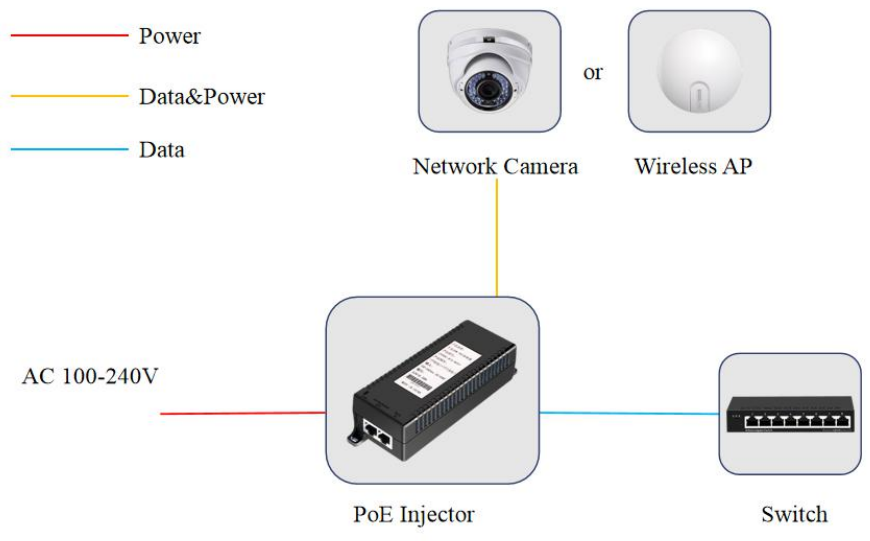

【Product Rendering】

